

Baseboard replacement

When removing a Baseboard always work very carefully and do not bend the baseboards nor use greater force to get them into place. Pay attention to the Network cables that are located right under the baseboards. They or the baseboards can be damaged if not handled with care.

Com Express Baseboard

Remove the two M2,5 screws (B) with a T8 Torx screwdriver from the mSATA drive, and the four M3 screws (A) with a 5,5mm hexagonal nut.

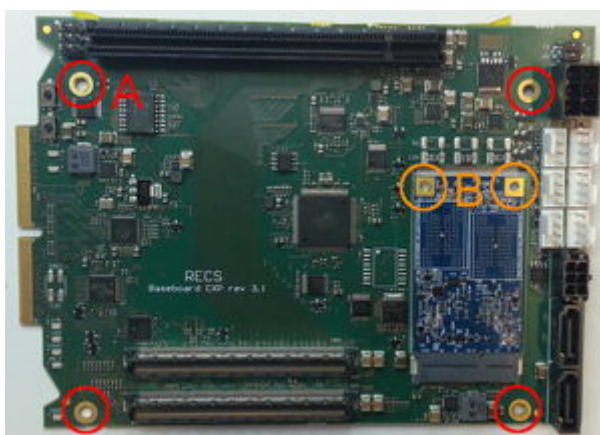


Fig. 1

ARM Baseboard

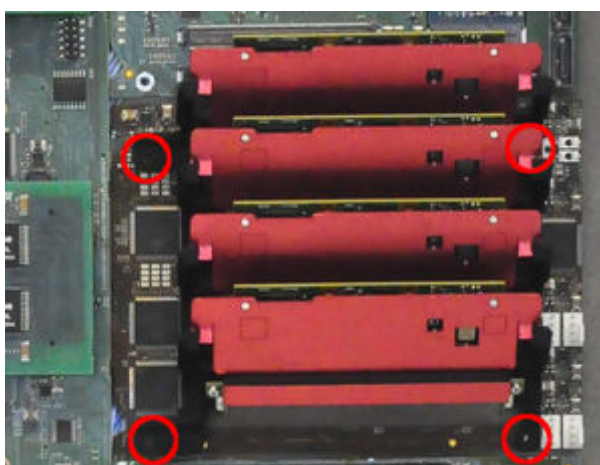


Fig. ##

Last
update:
2014/11/03 15:24 documentation:baseboard_replacement https://recswiki.christmann.info/wiki/doku.php?id=documentation:baseboard_replacement&rev=1415028254

From:
<https://recswiki.christmann.info/wiki/> - RECS® | Box Wiki

Permanent link:
https://recswiki.christmann.info/wiki/doku.php?id=documentation:baseboard_replacement&rev=1415028254

Last update: **2014/11/03 15:24**

